
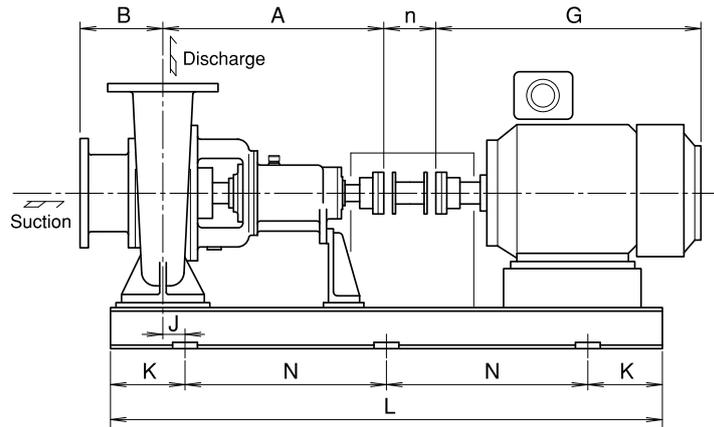


# 外形寸法図(UB型)

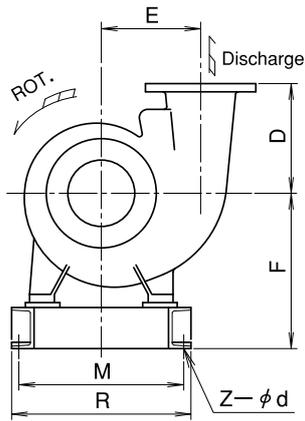

単位:mm

型式- 極数	口径 吸込/吐出	ポンプ					本体 質量 (kg)	モーター		台 板															
		A	B	D	E	n		枠番	G	フートサポート								センターサポート							
										J	Z-d	K	N	L	M	R	F	J	Z-d	K	N	L	M	R	F
0318-4P -2P	40/32	435	100	160	130	100	50	90L	314	50	4-15	125	650	900	220	250	230	-150	4-19	125	850	1100	500	550	265
								132S	447	50	4-19	125	700	1000	310	350	255	-125	4-19	150	900	1200	500	550	265
0323-4P -2P	40/32	435	145	180	130	100	50	90L	314	50	4-15	125	650	900	220	250	270	-150	4-19	125	850	1100	500	550	305
								132S	447	50	4-19	125	700	1000	310	350	295	-125	4-19	150	900	1200	500	550	305
0418-4P -2P	50/40	435	110	150	130	100	55	90L	314	50	4-15	125	650	900	220	250	250	-150	4-19	125	850	1100	500	550	225
								132S	447	50	4-19	125	700	1000	310	350	275	-125	4-19	150	900	1200	500	550	225
0423-4P -2P	50/40	435	110	180	160	100	65	100L	352	50	4-19	125	750	1000	260	300	275	-75	4-19	200	900	1200	550	600	285
								160L	619	75	4-19	150	900	1200	360	400	275	-75	4-23	200	1000	1400	540	600	310
0518-4P -2P	80/50	435	110	160	135	100	75	100L	352	50	4-19	125	750	1000	260	300	265	-75	4-19	200	900	1200	550	600	275
								160L	619	75	4-19	150	900	1200	360	400	265	-75	4-23	200	1000	1400	540	600	300
0523-4P -2P	80/50	440	110	180	160	100	85	112M	376	50	4-19	125	850	1100	360	400	285	-125	4-19	150	1000	1300	550	600	295
								200L	762	75	4-19	150	900	1200	360	400	285	-75	4-23	200	1000	1400	540	600	320
0818-2P	100/80	435	130	170	150	100	90	200L	762	60	4-19	150	1000	1300	400	450	295	-90	4-23	200	1000	1400	790	850	340
0823-4P -2P	100/80	505	130	200	190	100	110	132M	485	60	4-19	150	900	1200	360	400	305	-90	4-23	200	1000	1400	790	850	340
								200L	762	110	4-23	200	1000	1400	450	500	330	-40	4-23	250	1100	1600	790	850	340
0828-4P	100/80	505	140	220	210	100	130	160M	575	60	4-19	150	900	1200	360	400	325	-90	4-23	200	1000	1400	790	850	360
1034-4P	150/100	600	160	280	240	100	160	160L	684	65	4-23	200	1000	1400	450	500	390	-85	4-23	250	1100	1600	790	850	410
1040-4P	150/100	600	180	310	270	100	200	200L	762	65	4-23	200	1100	1500	400	450	400	-85	4-23	250	1200	1700	890	950	410
1523-4P	200/150	505	160	250	230	130	140	180M	646	110	4-23	200	1000	1400	450	500	360	-40	4-23	250	1100	1600	840	900	370
1528-4P	200/150	620	160	280	240	130	170	200L	762	65	4-23	200	1100	1500	400	450	370	-85	4-23	250	1200	1700	840	900	380
2534-6P -4P	250/250	780	305	350	320	230	400	225S	782	40	6-23	150	800	1900	590	650	570	-170	6-23	150	900	2100	1140	1200	580
								250M	916	40	6-23	150	900	2100	590	650	580	-170	6-23	200	950	2300	1140	1200	600
2540-6P -4P	250/250	780	300	400	360	230	480	280M	1022	40	6-23	150	900	2100	590	650	580	-150	6-23	200	950	2300	1140	1200	600
								315S	1445	10	6-23	200	900	2200	690	750	580	-150	6-23	200	1000	2400	1140	1200	600
2546-6P -4P	250/250	850	250	380	350	180	600	400L	1580	20	6-23	200	1000	2400	740	800	610	-60	6-25	250	1050	2600	1130	1200	630
3034-4P	300/300	795	335	400	370	300	590	250M	967	70	6-23	150	900	2100	690	750	620	-	-	-	-	-	-	-	-
3040-4P	300/300	865	295	420	395	300	700	280M	1166	10	6-23	200	950	2300	840	900	670	-	-	-	-	-	-	-	-
3540-4P	350/350	918	390	430	420	300	860	280M	1166	40	6-23	200	1000	2400	840	900	670	-	-	-	-	-	-	-	-

(注) ・フランジ規格は、JIS 10K、20K、API、ASMEクラス150、300等、ご要望により製作致します。  
 ・表中J寸法のマイナス符号は、図示と逆方向に位置することを示します。  
 ・外形寸法は変更することがありますので、外形寸法図をご確認ください。