


■ 外形寸法図 (UEN型)

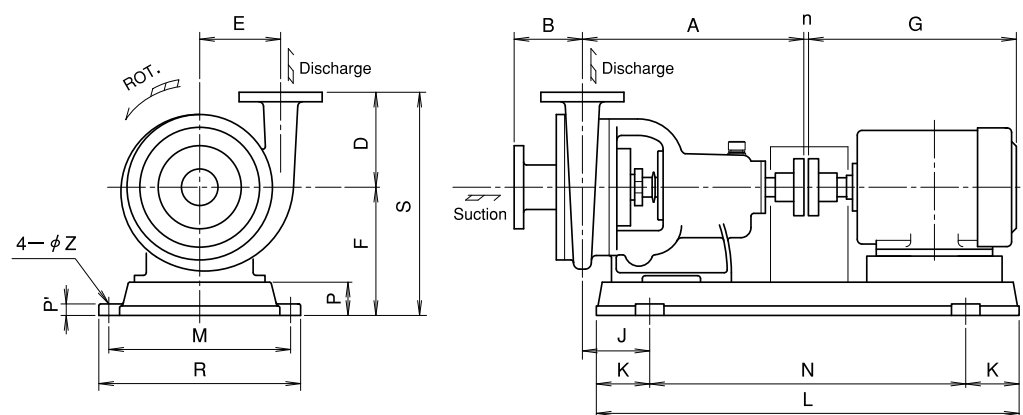

参考寸法は次頁に示す

単位:mm

型式 (-極数)	口径 吸込/吐出	ポンプ								脚体 番号	モーター				台 板											単位: mm
		A	B	D	E	F	J	質量 (kg)	枠番		出力 (kW)	G	質量 (kg)	Z	d	K	N	L	M	R	P	P'	n	質量 (kg)		
0400-4P	40/40	337	110	135	85	185	122	30	120	80	0.75	262	11	15	M12	110	350	570	250	286	50	14	3	13		
-2P	40/40	337	110	135	85	190	152	30	120	112M	3.7	376	41	15	M12	120	390	630	280	316	55	18	3	18		
0410-4P	40/40	340	110	140	100	185	145	35	120	90L	1.5	314	20	15	M12	110	350	570	250	286	50	14	3	13		
-2P	40/40	340	110	140	100	205	135	35	120	132S	5.5	445	55	19	M16	150	480	780	330	370	70	25	3	28		
0420-4P	40/40	375	115	160	125	220	125	44	130	100L	2.2	348	29	15	M12	140	450	730	300	336	60	18	3	21		
-2P	40/40	375	115	160	125	242	165	44	130	160M	11	585	100	19	M16	180	570	930	385	425	82	25	3	45		
0500-4P	50/40	340	115	140	95	185	145	34	120	90L	1.5	314	20	15	M12	110	350	570	250	286	50	14	3	13		
-2P	50/40	340	115	140	95	205	135	34	120	132S	7.5	445	55	19	M16	150	480	780	330	370	70	25	3	28		
0510-4P	50/40	375	115	160	115	220	125	43	130	100L	2.2	348	29	15	M12	140	450	730	300	336	60	18	3	21		
-2P	50/40	375	115	160	115	242	165	43	130	160M	15	585	100	19	M16	180	570	930	385	425	82	25	3	45		
0520-4P	50/40	375	115	170	135	220	150	46	130	112M	3.7	376	41	15	M12	140	450	730	300	336	60	18	3	21		
-2P	50/40	375	115	170	135	242	165	46	130	160M	15	585	100	19	M16	180	570	930	385	425	82	25	3	45		
0530-4P	50/40	433	120	200	160	250	160	68	140	132M	7.5	483	66	19	M16	170	540	880	350	396	70	25	3	31		
0600-4P	65/50	345	120	150	105	185	150	38	120	90L	1.5	314	20	15	M12	110	350	570	250	286	50	14	3	13		
0610-4P	65/50	380	120	170	115	220	155	48	130	112M	3.7	376	41	15	M12	140	450	730	300	336	60	18	3	21		
0620-4P	65/50	433	120	180	135	250	185	63	140	132S	5.5	445	55	19	M16	150	480	780	330	370	70	25	3	28		
0800-4P	80/65	380	125	170	115	220	155	51	130	112M	3.7	376	41	15	M12	140	450	730	300	336	60	18	3	21		
-2P	80/65	380	125	170	115	242	195	51	130	160L	18.5	630	125	19	M16	180	570	930	385	425	82	25	3	45		
0810-4P	80/65	438	125	180	130	250	190	61	140	132S	5.5	445	55	19	M16	150	480	780	330	370	70	25	3	28		
-2P	80/65	438	125	180	130	272	195	61	140	180M	22	656	180	19	M16	200	630	1030	430	470	92	27	3	58		
0820-4P	80/65	495	125	200	150	275	200	86	145	132M	7.5	438	66	19	M16	170	540	880	350	396	70	25	3	31		
-2P	80/65	495	125	200	150	295	250	86	145	180L	30	694	215	19	M16	200	630	1030	430	470	90	27	3	58		
0840-4P	80/50	496	135	220	185	295	231	107	145	160L	15	630	125	19	M16	200	630	1030	430	470	90	27	3	58		
1000-4P	100/80	438	135	180	135	250	190	64	140	132S	5.5	445	55	19	M16	150	480	780	330	370	70	25	3	28		
1002-2P	100/80	438	135	180	135	272	220	64	140	180L	30	694	215	19	M16	200	630	1030	430	470	92	27	3	58		
1010-4P	100/80	438	135	200	140	250	165	65	140	132M	7.5	483	66	19	M16	170	540	880	350	396	70	25	3	31		
*1010-2P	100/80	499	135	200	140	305	254	84	145	200L	45	762	290	19	M16	220	690	1130	525	571	100	30	4	89		
1030-4P	100/80	495	135	220	170	295	230	100	145	160L	15	630	125	19	M16	200	630	1030	430	470	90	27	3	58		
1050-4P	100/80	563	180	250	205	360	60	136	155	180M	22	656	180	19	M16	270	840	1380	525	571	110	30	3	104		
1200-4P	125/100	510	180	190	150	275	215	94	145	132M	7.5	438	66	19	M16	170	540	880	350	396	70	25	3	31		
1220-4P	125/100	495	155	220	170	295	230	111	145	160L	15	630	125	19	M16	200	630	1030	430	470	90	27	3	58		
1230-4P	125/100	495	145	240	180	295	230	115	145	180M	18.5	656	180	19	M16	200	630	1030	430	470	90	27	3	58		
1500-4P	150/125	520	205	210	160	275	225	104	145	132M	7.5	438	66	19	M16	170	540	880	350	396	70	25	3	31		
1520-4P	150/125	505	180	210	175	295	240	115	145	160L	15	630	125	19	M16	200	630	1030	430	470	90	27	3	58		
1540-4P	150/125	564	205	265	215	360	91	190	155	180L	30	630	215	19	M16	270	840	1380	525	571	110	30	4	104		
1550-4P	150/100	680	200	275	240	410	210	214	165	200L	45	762	290	19	M16	270	840	1380	525	571	110	30	4	104		
1571-4P	150/100	680	200	290	260	445	175	230	165	250S	75	842	470	23	M20	250	1100	1600	550	600	145	25	4	200		
2010-4P	200/150	573	217	250	190	360	70	196	155	160L	15	630	125	19	M16	270	840	1380	525	571	110	30	3	104		
2020-4P	200/150	695	210	270	215	410	175	234	165	180M	22	656	180	19	M16	270	840	1380	525	571	110	30	3	104		
2040-4P	200/150	696	225	285	230	410	175	242	165	225S	55	807	335	23	M20	300	930	1530	525	571	110	30	4	110		
2050-4P	200/150	806	215	300	245	500	157	323	170	250S	75	842	470	23	M20	250	1200	1700	550	600	145	25	4	240		
2060-4P	200/150	801	235	325	275	500	152	366	170	250M	90	923	520	23	M20	250	1200	1700	550	600	145	25	4	240		
2520-4P	250/200	695	270	300	220	410	225	275	165	200L	37	762	290	19	M16	270	840	1380	525	571	110	30	4	104		
2540-4P	250/200	819	250	330	255	500	170	340	170	250M	90	923	520	23	M20	250	1200	1700	550	600	145	25	4	240		
2560-4P	250/200	819	280	380	290	525	220	391	170	315S	150	1230	1200	25	M22	300	1300	1900	640	700	170	28	4	330		

(注) ・標準付属品:共通台板、軸継手、基礎ボルト、安全カバー
・台板はL寸法が1600mm以上のものは鋼板製です。
・(*)2Pの場合、型式はUENM-1010となります。
・モーターは60Hz最大出力での参考寸法を示しますので、外形寸法は変更となることがあります。
詳細については外形寸法図をご要求ください。