
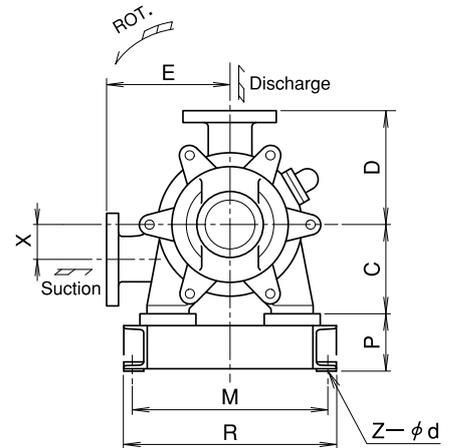


外形寸法図 (MCF、MCH型)

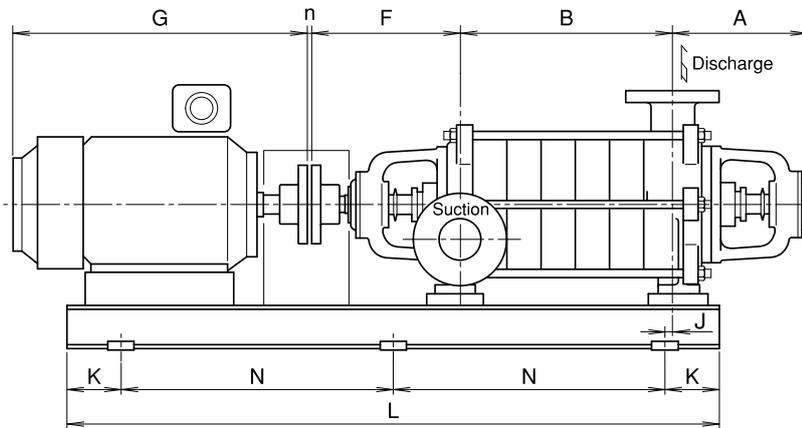

単位:mm

型式	口径 吸込/吐出	ポンプ								本体 質量 (kg)	モーター			台板						
		A	B	C	D	E	F	X	n		枠番 (参考)	G	J	Z-d	K	N	L	M	R	P
MCF-3-0415	40/40	228	140	135	165	160	235	0	3	65	132S	446.5	40	4-15	125	650	900	370	400	90
4-0415	40/40	228	185	135	165	160	235	0	3	76	160M	575	40	4-19	125	850	1100	410	450	120
5-0415	40/40	228	230	135	165	160	235	0	3	87	160M	575	40	4-19	125	850	1100	410	450	120
6-0415	40/40	228	275	135	165	160	235	0	3	98	160M	575	65	4-19	150	900	1200	410	450	120
7-0415	40/40	228	320	135	165	160	235	0	3	109	160L	619	65	4-19	150	900	1200	410	450	120
8-0415	40/40	228	365	135	165	160	235	0	3	120	160M	575	65	4-19	150	1000	1300	410	450	120
9-0415	40/40	228	410	135	165	160	235	0	3	132	160M	575	65	4-19	150	1000	1300	410	450	150
MCF-3-0418	50/40	318	177	180	190	210	324	60	3	89	180M	646	60	4-19	150	900	1200	460	500	115
4-0418	50/40	318	227	180	190	210	324	60	4	106	200L	776	60	4-19	150	1000	1300	460	500	115
5-0418	50/40	318	277	180	190	210	324	60	4	123	200L	776	124	4-23	200	1000	1400	450	500	150
6-0418	50/40	318	327	180	190	210	324	60	4	140	225S	782	124	4-23	200	1000	1400	450	500	150
7-0418	50/40	318	377	180	190	210	324	60	4	157	225S	782	124	4-23	200	1100	1500	450	500	150
8-0418	50/40	318	427	180	190	210	324	60	4	174	200L	776	124	4-23	200	1100	1500	450	500	150
9-0418	50/40	318	477	180	190	210	324	60	4	191	200L	776	169	4-23	250	1100	1600	450	500	150
MCF-3-0523	80/50	402	205	230	240	240	395	0	4	115	225S	782	124	4-23	200	1100	1500	500	550	150
4-0523	80/50	402	265	230	240	240	395	0	4	140	250S	848	124	4-23	200	1100	1500	550	600	150
5-0523	80/50	402	325	230	240	240	395	0	4	165	250M	886	169	4-23	250	1200	1700	600	650	150
6-0523	80/50	402	385	230	240	240	395	0	4	190	280S	971	169	4-23	250	1200	1700	600	650	150
7-0523	80/50	402	445	230	240	240	395	0	4	215	250S	886	169	4-23	250	1200	1700	600	650	150
MCH-3-1030	125/100	430	380	300	350	350	425	0	4	460	200L	776	130	4-23	250	1200	1700	450	500	150
4-1030	125/100	430	480	300	350	350	425	0	4	520	200L	776	30	6-23	150	750X2	1800	450	500	180
5-1030	125/100	430	580	300	350	350	425	0	4	580	225S	782	30	6-23	150	800X2	1900	490	550	180
6-1030	125/100	430	680	300	350	350	425	0	4	640	250S	886	30	6-23	150	850X2	2000	490	550	180
7-1030	125/100	430	780	300	350	350	425	0	4	700	250M	971	20	6-23	150	900X2	2100	540	600	180
8-1030	125/100	430	880	300	350	350	425	0	4	760	250M	971	80	6-23	200	900X2	2200	540	600	180
9-1030	125/100	430	980	300	350	350	425	0	4	820	225S	782	80	6-23	200	900X2	2200	490	550	180
10-1030	125/100	430	1080	300	350	350	425	0	4	880	250S	886	80	6-23	200	950X2	2300	490	550	210
MCH-2-2037	200/200	470	450	400	480	450	514	0	4	1010	355L	1730	115	6-23	200	950X2	2300	790	850	210
3-2037	200/200	470	615	400	480	450	514	0	4	1210	355L	1730	165	6-23	250	1000X2	2500	790	850	210
4-2037	200/200	470	780	400	480	450	514	0	5	1410	400L	1800	165	6-25	250	1100X2	2700	890	950	230
5-2037	200/200	470	945	400	480	450	514	0	5	1610	400L	1800	215	6-25	300	1150X2	2900	890	950	230

(注) ・寸法はJIS 10K規格の場合で記載してありますので、規格・仕様により寸法を変更することがあります。
 ・モーターは最大出力の参考寸法を示しますので、外形寸法は変更となることがあります。
 詳細については外形寸法図をご確認ください